
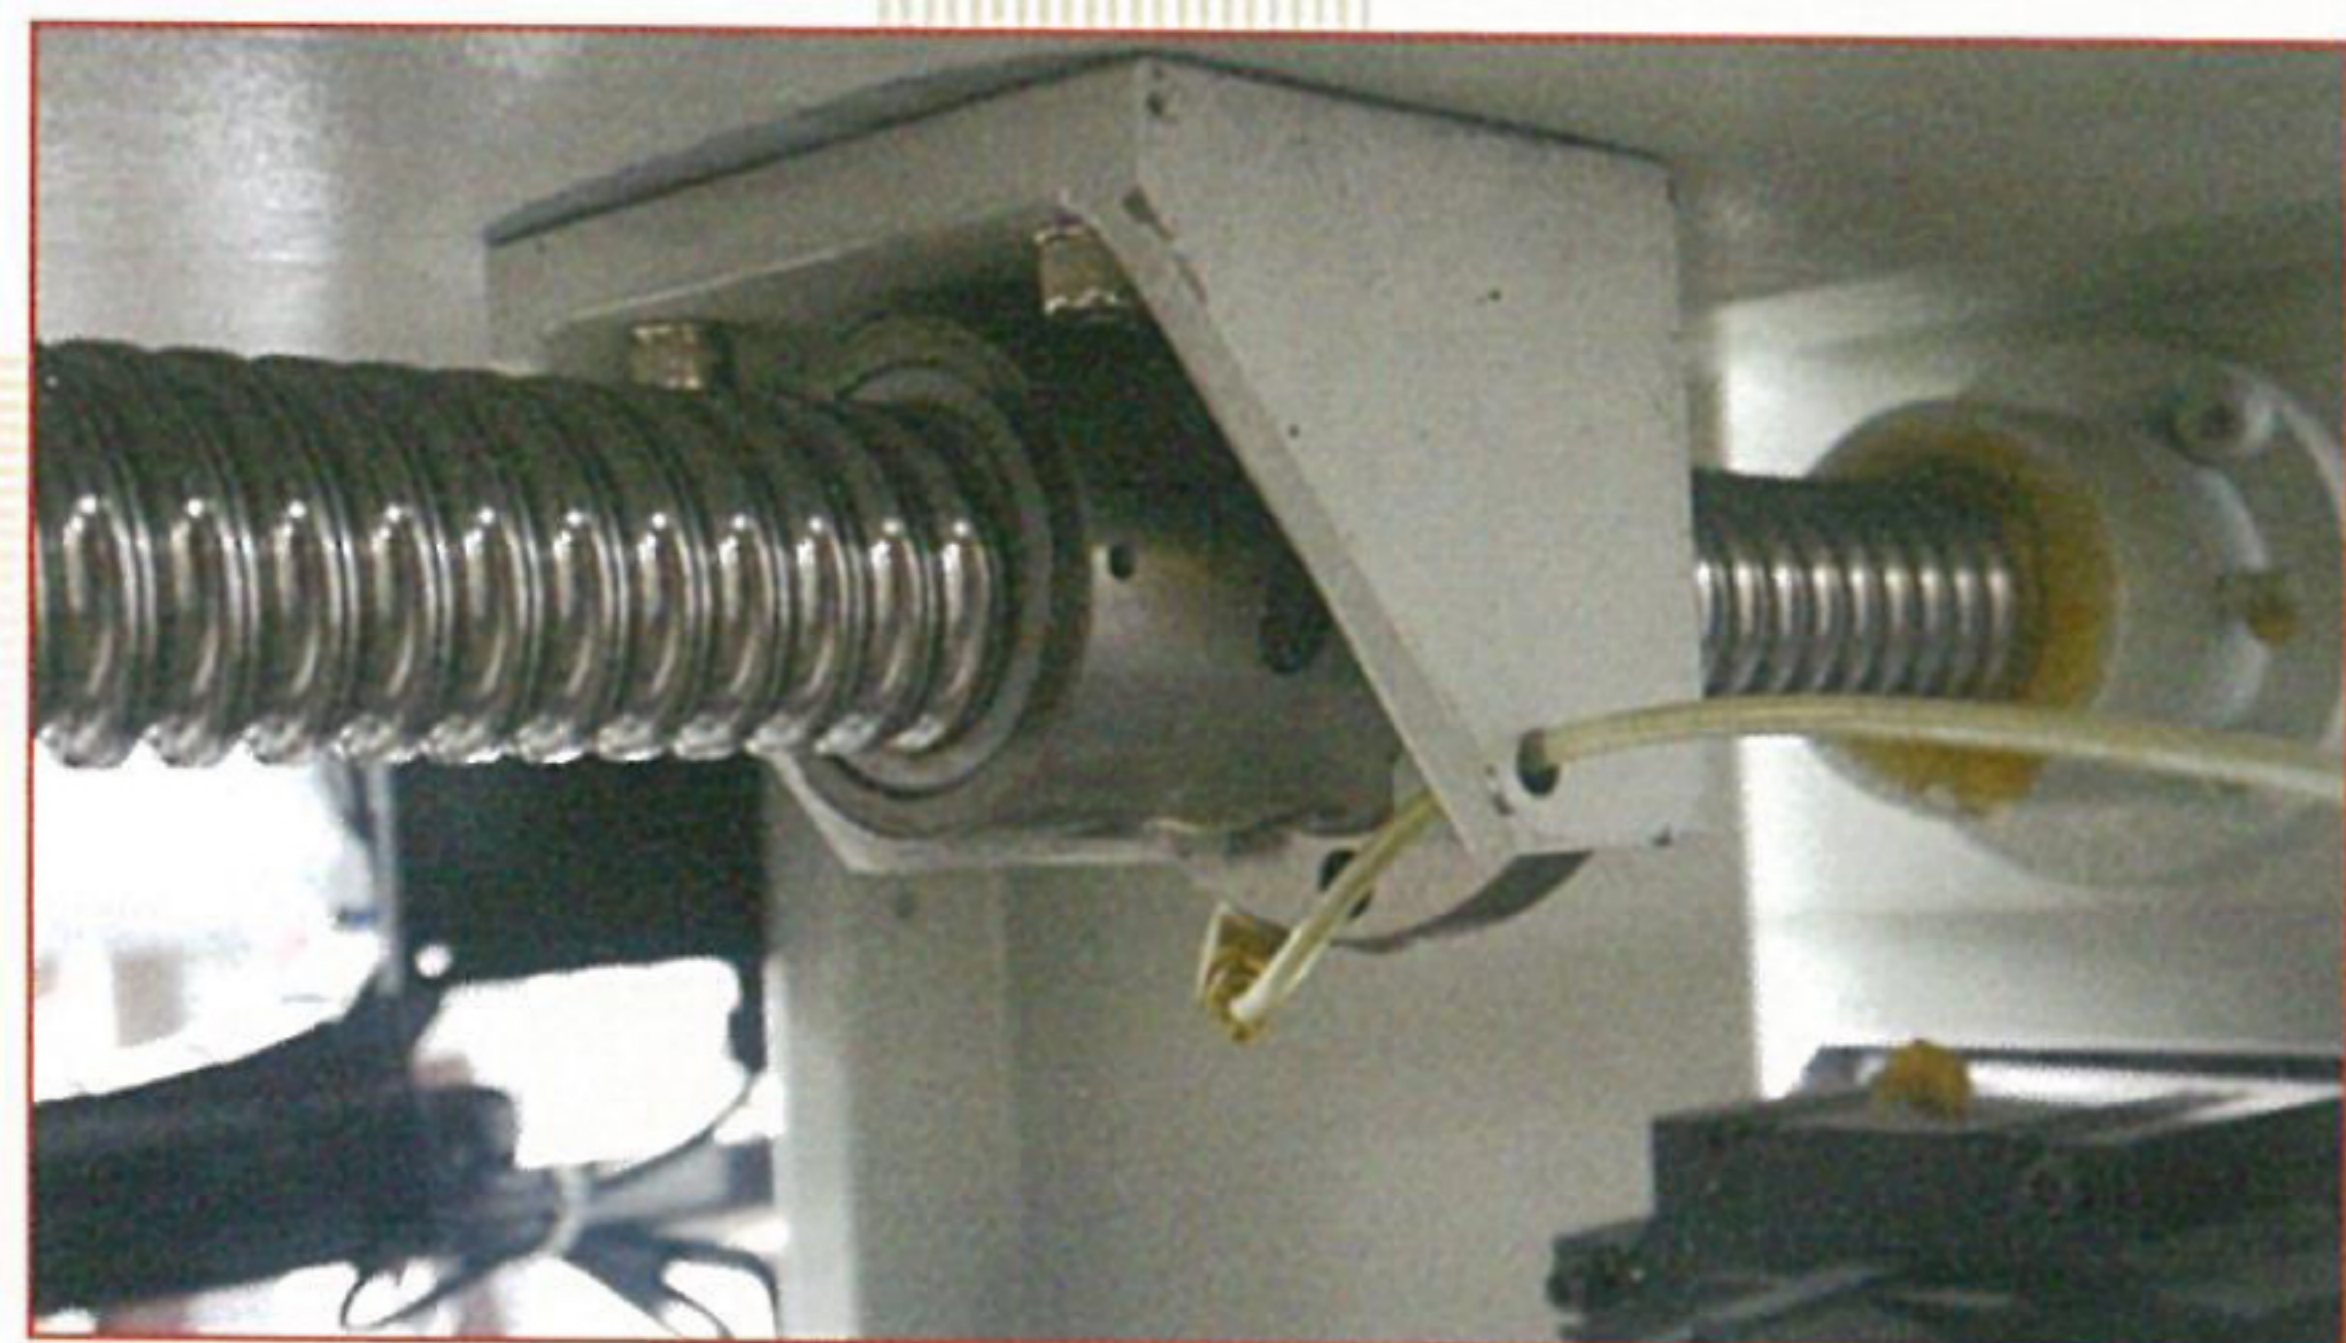


Linear guider
線性滑軌

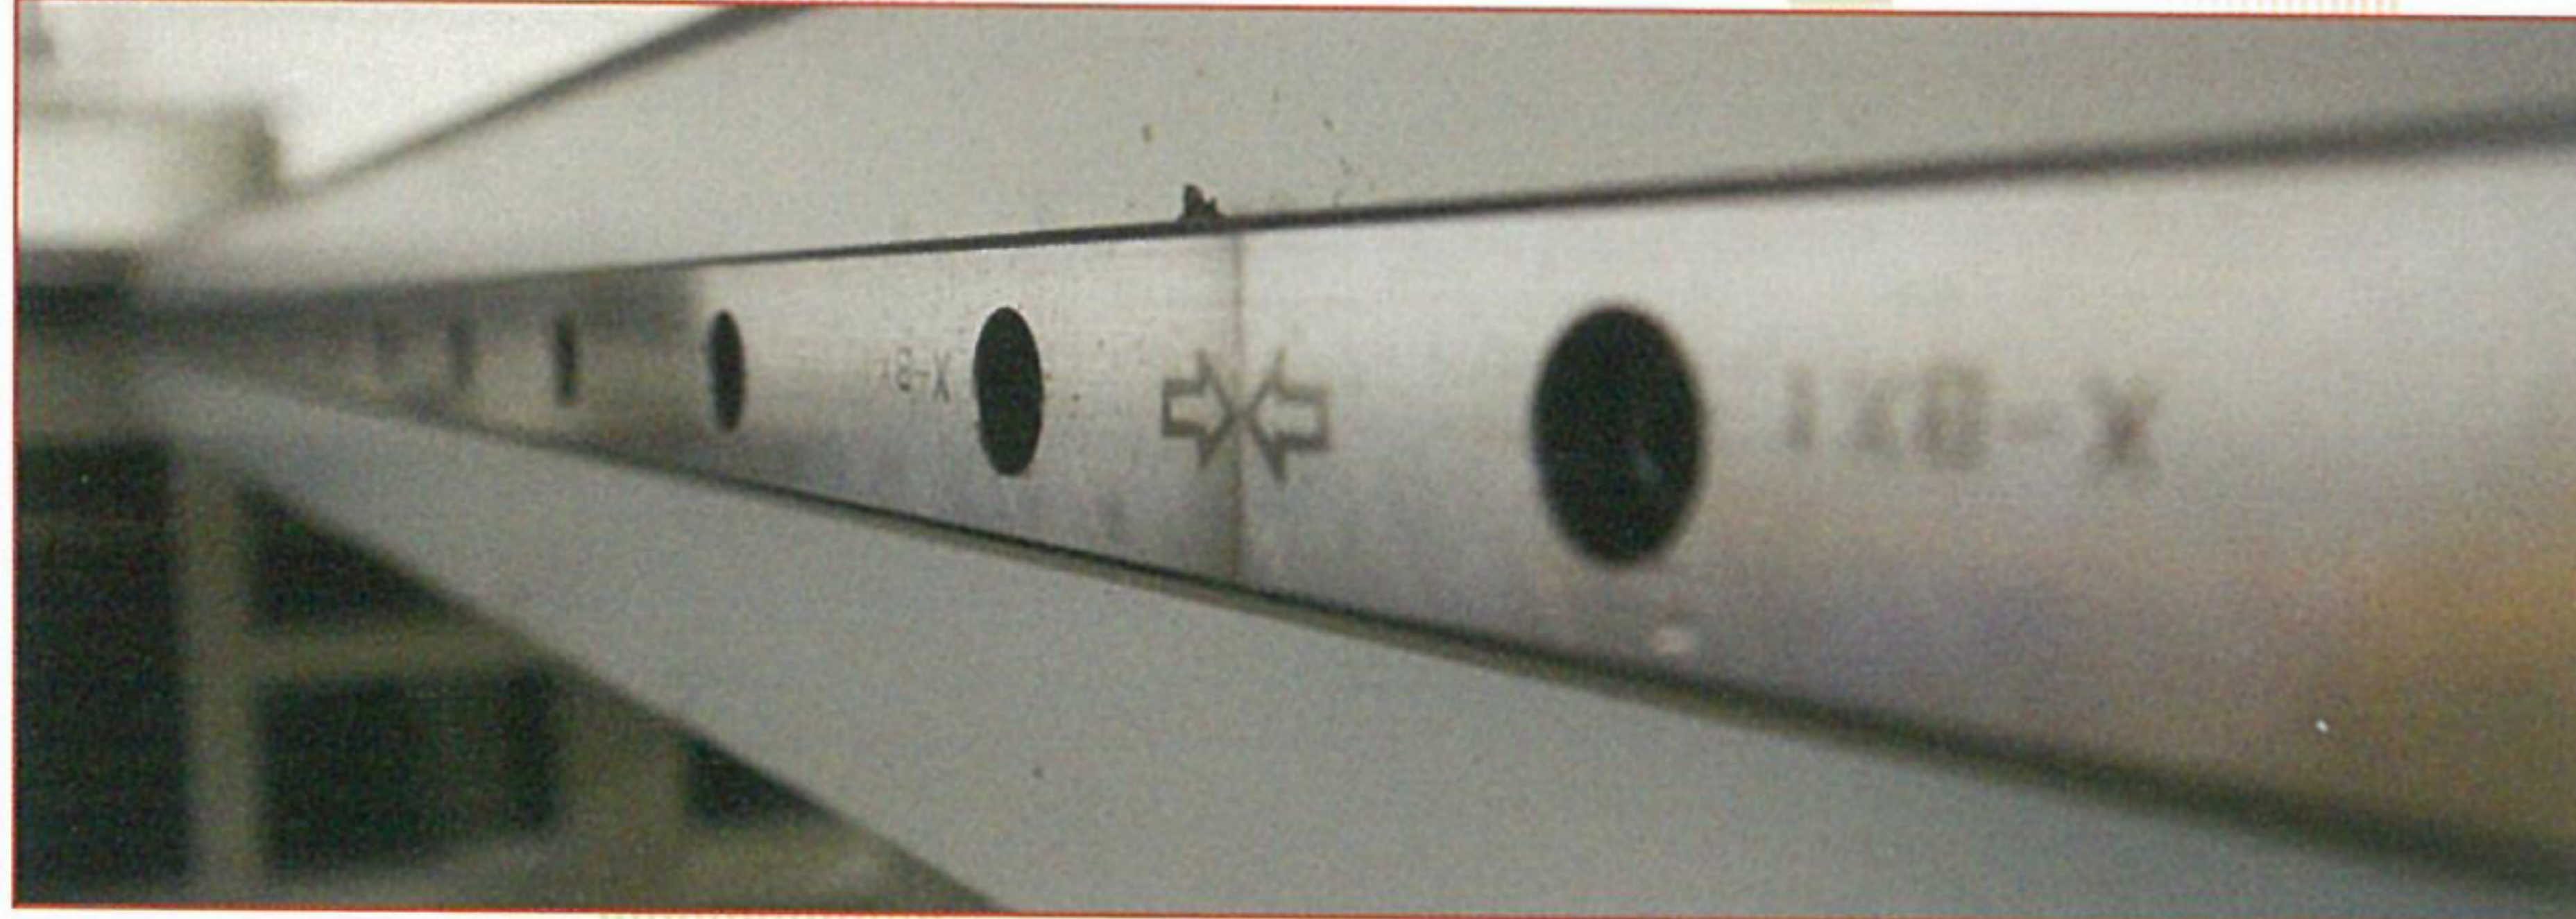

Precision ball
精密滾珠螺桿

MODEL 型式		TPS-8PE	TPS-10PE
Max. cutting length	鋸切長度	2600×2450mm	3200×3100mm
Max. cutting depth	鋸切厚度	60mm (Max. 80 mm)	
Main sawblade diameter	主鋸片直徑	Ø305mm (Max. Ø355mm)	
Main sawblade arbor diameter	主鋸軸直徑	Ø25.4mm (Ø30mm optional)	
Scoring sawblade diameter	副鋸片直徑	Ø180mm	
Scoring sawblade arbor diameter	副鋸軸直徑	Ø25.4mm (Ø30mm optional)	
Saw carriage forward speed	鋸座前進速度	1~40 M/min	
Saw carriage return speed	鋸座後退速度	70 M/min	
Main sawblade motor	主鋸片馬達	15 HP	
Saw carriage drive motor	鋸座驅動馬達	2 HP	
High pressure blower motor	高壓送風機馬達	3 HP	
Pusher feed motor	工夾座送料馬達	1 KW	
Number of grippers	工夾數	7	8
Floating tables	浮動台	1520 × 500mm × 3unit	
Pusher feed speed	工夾座送料速度	20 M/min	
Working air pressure	使用氣壓	5~6 kg/cm ²	
Table height from floor	工作台離地高度	890mm	